




**9200 A VERNIER CALIPER - PREMIUM**

- ISO 3599, DIN 862
- Accurate to 0.02 mm (1/50 mm). Inside, outside and depth measurements.
- Divided into mm and inches. Vernier with thumb positioning guide.
- Resolution: 0.02 mm / 0.001"
- Jaw length: 40 mm.
- Vernier screw lock. Supplied in plastic case.
- Surface: Matt chrome beam and vernier. Material: Stainless steel.

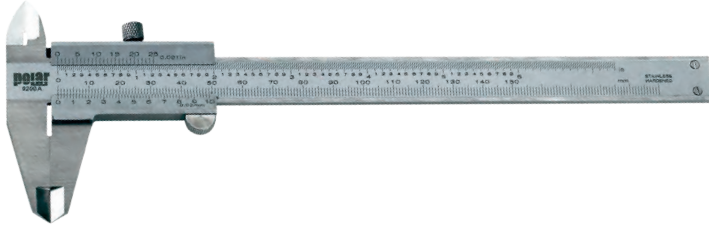

<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9200-0150	009582	0-150 mm / 0-6"	155	1

**9300 A VERNIER CALIPER**

- ISO 3599, DIN 862.
- With locking screw.
- Divided into mm and inches
- Resolution: 0,02 mm / 0,001"
- Jaw length: 40 mm
- Supplied in plastic casing.
- Surface: Matt chrome beam and vernier. Material: Stainless steel.



<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9300-0150	032115	0-150 mm / 0-6"	156	1

**9300 B VERNIER CALIPER**

- ISO 3599, DIN 862.
- With thumb-lock.
- Divided into mm and inches.
- Resolution: 0,05 mm / 0,002"
- Jaw length: 40 mm
- Supplied in plastic casing.
- Surface: Matt chrome beam and vernier. Material: Stainless steel.



<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9300-2150	032122	0-150 mm / 0-6"	160	1

**9300 P PLASTIC CALIPER**


- Divided into mm and inches.
- Resolution: 0,05 mm / 0.002"
- Jaw length: 40 mm
- Material: Plastic.



<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9300-3150	032429	0-150 mm / 0-6"	27	1

**9301 A DIGITAL CALIPER**

- Switch mm/inches. Zero setting. On/Off button.
- With locking screw. 4 measurement functions.
- Resolution: 0,01 mm / 0,0005"
- Accuracy: ±0,02 mm.
- Jaw length: 40 mm.
- Measuring Speed: 3 m/s.
- Working Temperature: 0 – ±40C°. Relative Temperature: -10 – ±80C°
- Supplied with two 3V CR2032 batteries. Material: Stainless Steel.

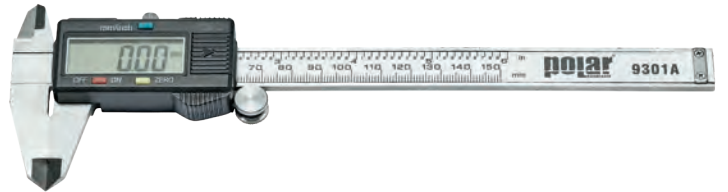

<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9301-0150	032092	0-150 mm / 0-6"	165	1

**9301 B DIGITAL CALIPER IP54**

- With ABS function. Switch mm/inches. Zero setting.
- On/Off button. With locking screw. 4 measurement functions.
- Resolution: 0,01 mm / 0,0005"
- Accuracy: ±0,02 mm
- Jaw length: 40 mm
- Measuring Speed: 1,5 m/s.
- Working Temperature: 0 – ±40C°. Relative Temperature: -10 – ±80C°
- Supplied with two 3V CR2032 batteries. Material: Stainless Steel.



<b>ITEM NO.</b>	5704196+	<b>RANGE</b> MM/"	G	
9301-1150	032108	0-150 mm / 0-6"	165	1